




Notes;

1. Code: 2010 FBC w/ 2009 Supplement
2. All aluminum components shall be 6061-T6.
3. All internal frame connections shall have butted elements welded using an ER 5356 0.125" fillet all around, compliant with AWS D.1.2. Size shall match the minimum thickness of the joined materials, u.o.n.
4. Screw fasteners shall be A316 stainless steel.
5. Concrete screws shall be embedded in structural concrete (not stucco) by a minimum of 1-1/2". Sized to prevent penetration of the balcony waterproofing membrane below the topping slab. .
6. Installation of concrete screws shall be in strict accordance with the manufacturer's instructions.

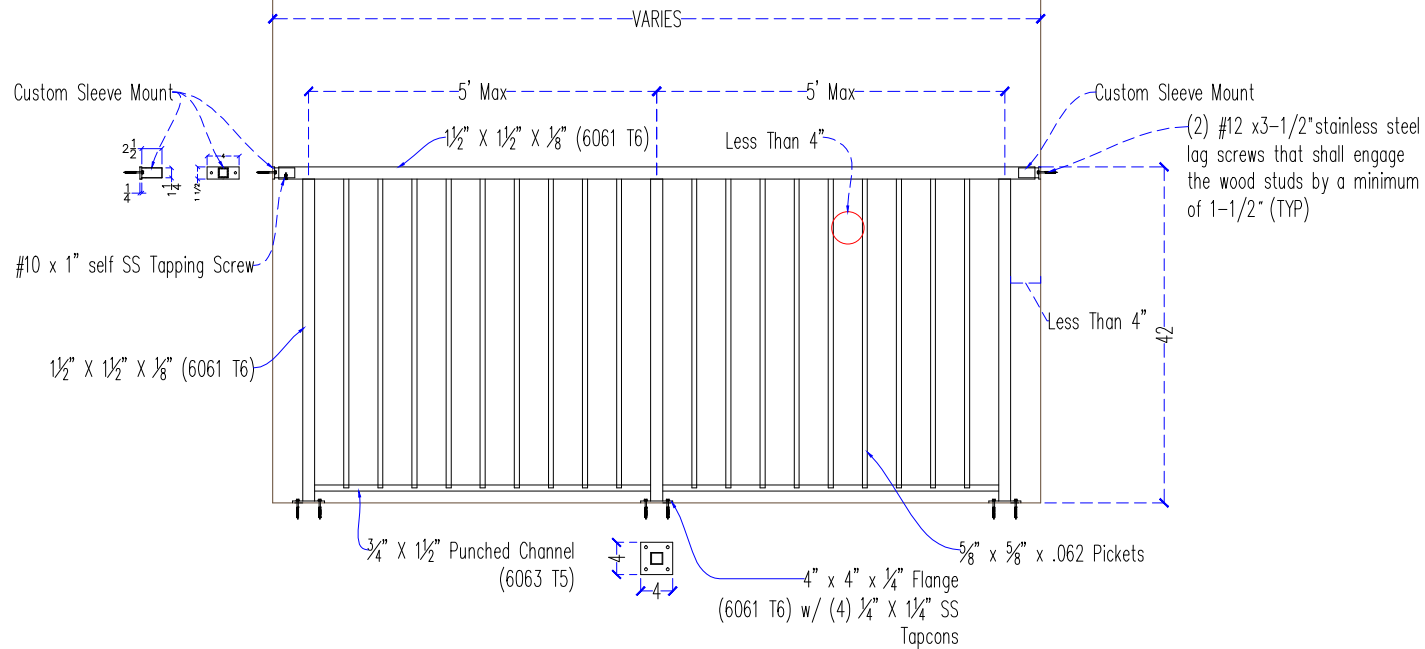

Project Name and Address
The Reserves at
Point Meadows
Coastal Reconstruction

Description
Aluminum Deck Railing

Date
06/05/12
Scale
3/4" = 1'

(01)